

# Bar Linear No Flange Removable Core Register

## DABLDRN



- Removable core held in place with clips
- Fully extruded aluminum construction for a stylish appearance
- Built-in Opposed Blade Damper with sliding operator
- Fixed blades designed for long straight air throw
- Sections joined together for continuous appearance. When longer than 84", aligning pins are provided.
- Available on 1/2" increments as standard
- Custom sizes available but extra charge may apply
- Durable powdercoat painted finish



**Not suitable for floor use**

**HOW TO ORDER**

**DABLDRN - 00 - D 30 x 4 COLOR**

Blade -00,-01 -15,-30 -82,-84	↑ Mounting C, D or TB	Width & Height	White Silver Mill or Brown
--	-----------------------------	-------------------	-------------------------------------

**Do not leave space if option is not required**

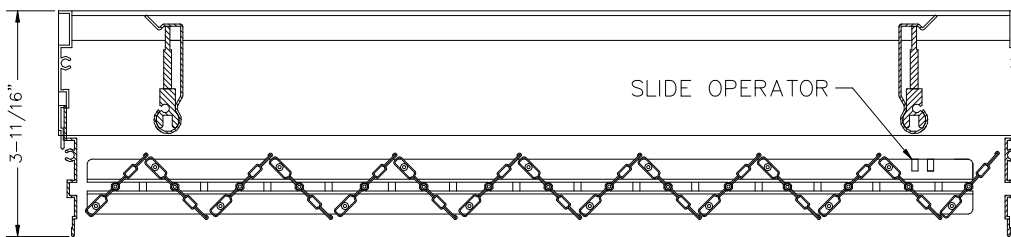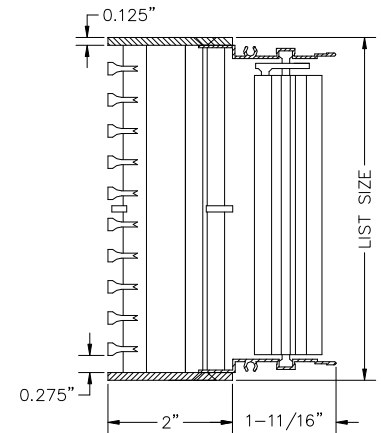

DESCRIPTION	DABLDRN
FACE BLADES	Horizontal Fixed
REAR BLADES	n/a
DAMPER	n/a
MATERIAL	Aluminum
COLOR	White/Silver/Brown/Mill

JOB NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_


ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

**Bar Linear Blade Options**


**-00-**

0° 13/64+blades on 1/2+centers

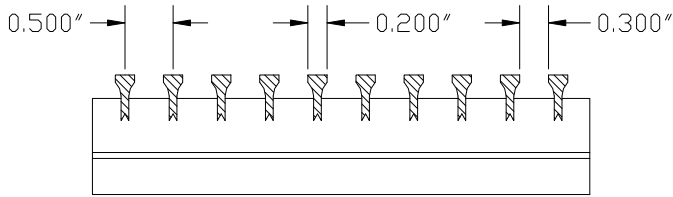


**-01-**

0° 1/4+blades on 1/2+centers

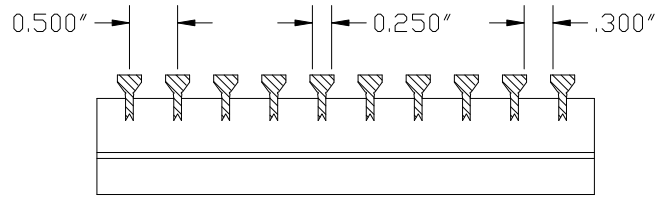


**-15-**

15° 13/64+blades on 1/2+centers

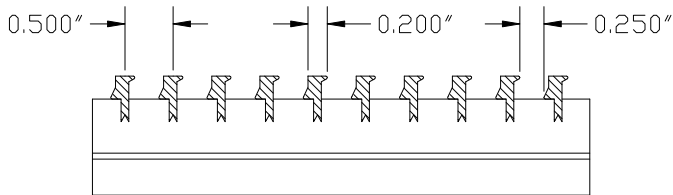


**-30-**

30° 13/64+blades on 1/2+centers

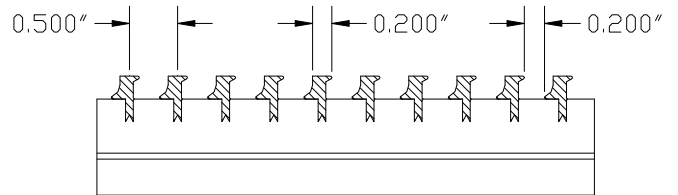


**-82-**

0° 1/8+blades on 1/2+centers

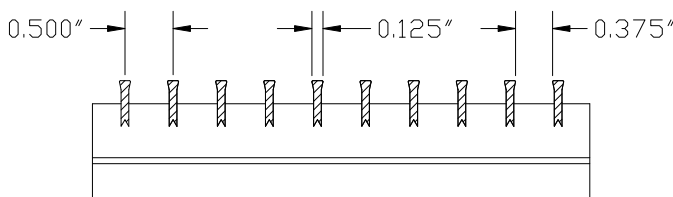

**-84-**

0° 1/8+blades on 1/4+centers

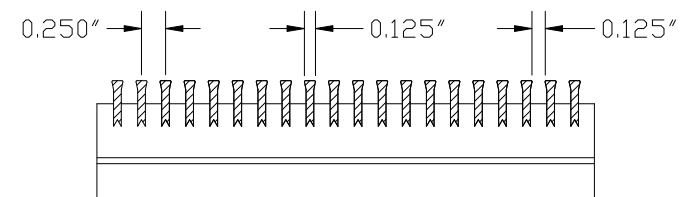


Additional charges apply for the -84 core option

**Bar Linear Mounting Options**


**-A**  
SCREWS

Color matched screws with counter-sunk screwholes.  
Suitable for ceiling, wall, sill or floor installation.

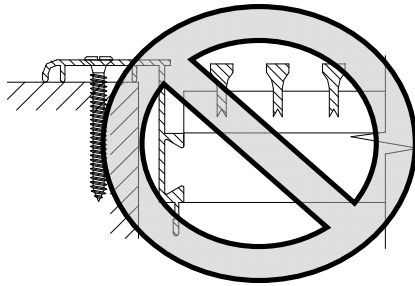

**-B**  
SPRING CLIPS


Clips behind the flange keep grille snug in opening and are not visible from the face.  
Only for floor and sill applications.  
**NOT suitable for wall or ceiling use.**

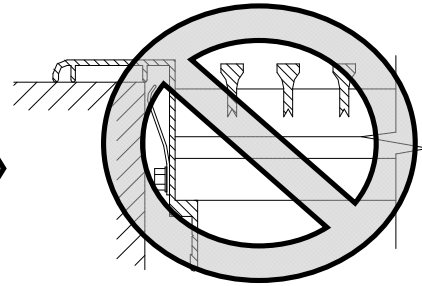

These mounting options are only available with flanged grilles


**-C**  
CONCEALED BRACKETS

Grille gets fastened to duct-mounted brackets that are concealed behind the blades.  
Suitable for ceiling, wall or sill installation.

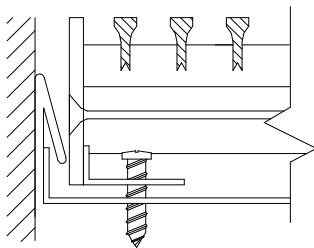

**-D**  
SIDEWALL SCREWHOLES

Screw holes drilled at 45° on inner flange.  
Only available with **-R Removable core**.  
(Removable option not available for floor)  
Suitable for ceiling, wall or sill installation.

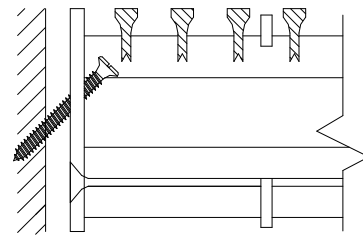

**-TB**  
NO MOUNTING OPTION

Suitable for T-Bar lay-in ceiling & custom applications.  
Please allow some clearance for installation

